


ϕ of pivot above ground — (4 up-static laden condition)

 (A) 9.90 in. (25.1 c.m.)

 (B) 9.90 in. (25.1 c.m.)

 (C) 10.18 in. (25.8 c.m.)

 (D) 10.37 in. (26.3 c.m.)

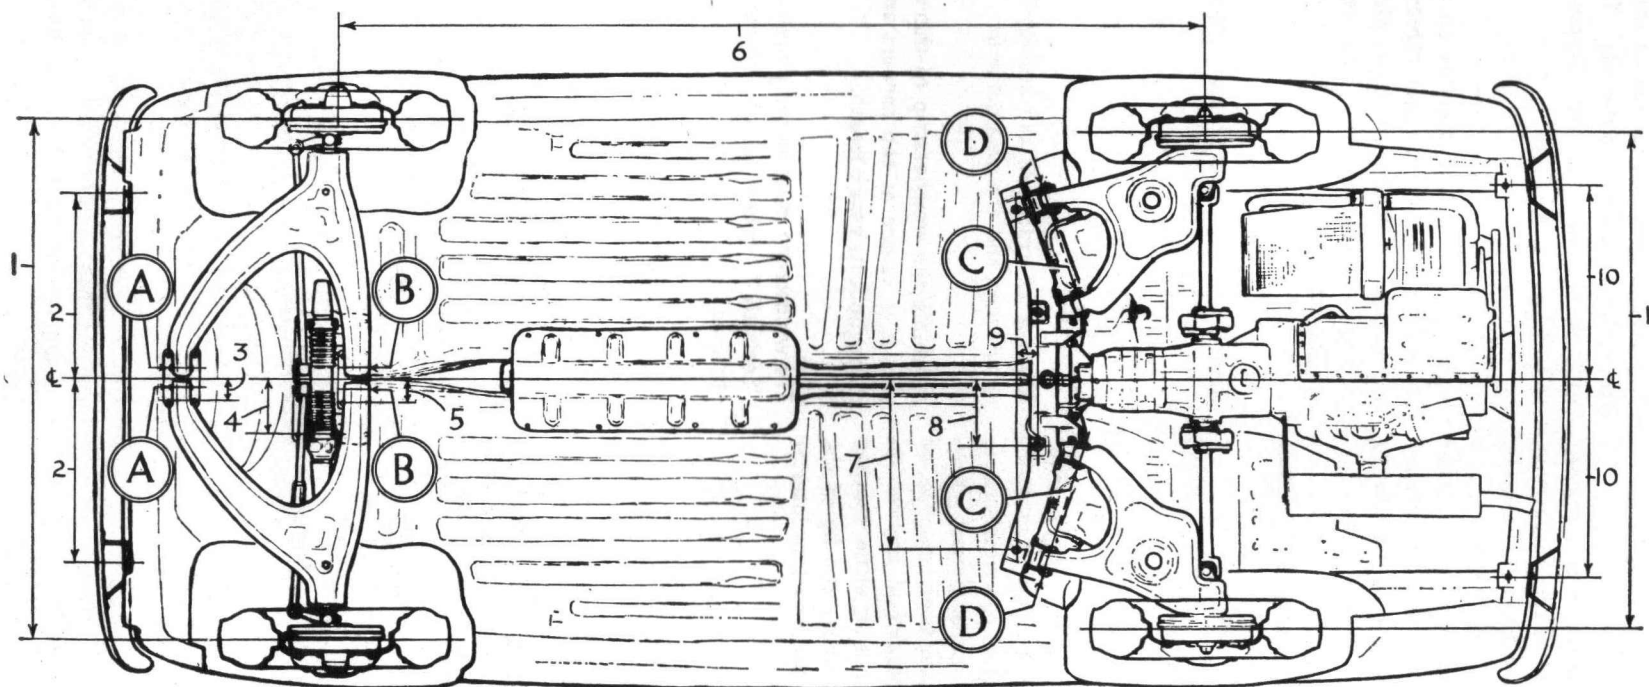

1 — 49.1 in. (124.6 c.m.)	2 — 17.63 in. (44.8 c.m.)	3 — 2.25 in. (5.7 c.m.)
4 — 5.34 in. (13.6 c.m.)	5 — 2.25 in. (5.7 c.m.)	6 — 82.0 in. (208.3 c.m.)
7 — 16.15 in. (41.0 c.m.)	8 — 6.5 in. (16.5 c.m.)	9 — 1.97 in. (5.0 c.m.)
10 — 19.0 in. (48.26 c.m.)	11 — 47.9 in. (121.6 c.m.)	7042

Fig. 1. Principal underframe dimensions